


# SL70 2-3nm+ Solar Marine Light

This equipment complies with requirements of the U.S. Coast Guard in 33 CFR part 66



Available with RF comm-sync or radio control

Automatic night activation  
6 ultra-high intensity LEDs  
Lens and base moulded from UV-stabilised LEXAN® polycarbonate  
Large industry standard 200mm OD base pattern for ease of installation

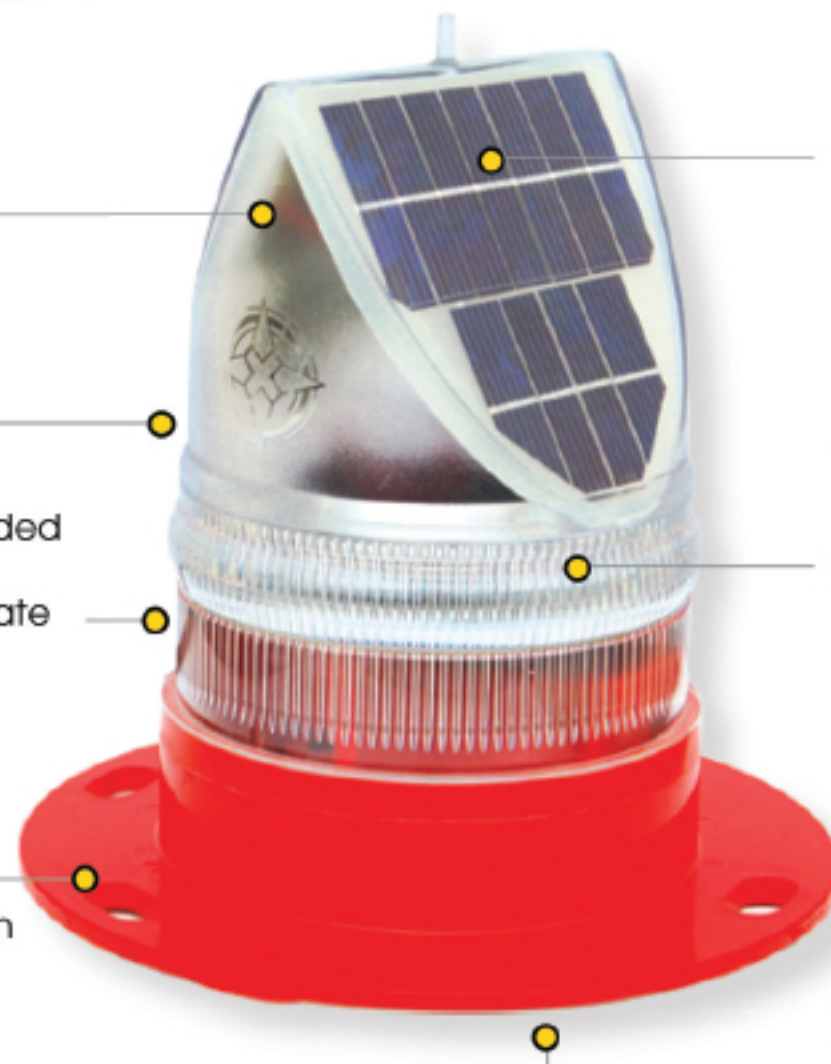

Dual internal high-performance solar modules  
LED lens and Sealite's 360° Omnidirectional LED Reflector (US Pat. No. 6,667,582. AU Pat. No. 778,918)  
Internal user-replaceable battery in sealed compartment

The Sealite SL70 is exceptional in its unique ability to be able to 'track the sun' and operate reliably in low sunlight conditions. The SL70 has been proven to operate as a 2-3+ mile compact buoy lantern in various low-sunlight environments such as Britain, Canada, and Europe.

Made from tough, durable polycarbonate and using the latest high intensity LED's, the SL70 lantern boasts dual high-performance solar modules incorporated into Sealite's world-first Solar Collection Lens. These solar modules are angled to obtain maximum sunlight capture, allowing the unit to operate reliably in a range of low sunlight environments.

The SL70 can be installed in minutes, and requires no operator intervention. The flash-characters are easily adjusted on-site by the user, and the lantern has a permanent ON/OFF switch for easy storage.

The sealed battery compartment allows the battery to be replaced after years of service - don't throw the light away at the end of the battery service life.

Sealite's SL70 solar marine light has been awarded the prestigious Australian DesignMark® at the Australian Design Awards; a testament of Sealite's commitment to the ongoing development of state-of-the-art products.

### Optional RF Communication Synchronisation (SL70-CS)

The SL70 is available with optional short-range RF communication synchronisation. Two (2) or more lights can be synchronised to flash in unison via an internal RF module - ideal for rivers, marina entrances, channel marking and aquaculture.

When lanterns flash in synchronisation they can be clearly distinguished from other nav aids and confusing background lighting - ideal for rivers, marina entrances, channel marking and aquaculture.

### Optional Remote Radio Control (SL70-RC)

Radio control may be fitted to the SL70 model enabling users to remotely modify the setup of their lantern via handheld radio controller (SL-RC-2.4).

### Optional 12 LED Light Configuration (SL70-12)


In high sunlight regions the SL70 may be fitted with 12 LED's and appropriate intensity settings to provide a range of >3 nautical miles (colour dependant).

## The Premier Advantage

- Reliable year-round operation in low sunlight conditions
- 256 IALA flash patterns, user-adjustable without the need for external devices
- User-replaceable battery in sealed battery compartment
- NiMH battery for long service life & wide temperature range
- 4 user-adjustable intensity settings
- ON/OFF storage switch
- IP68 waterproof



### SL70 Vertical Divergence

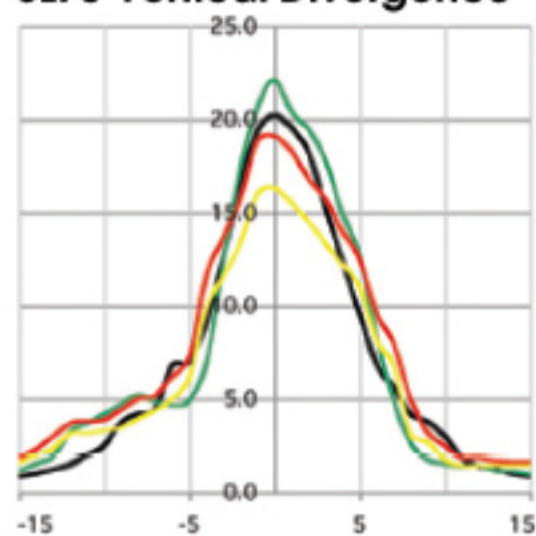


Candela (cd)	
	SL70
R	19.1
G	22.1
W	20.2
Y	16.3

# SL70 2-3nm+ Solar Marine Light



User replaceable battery

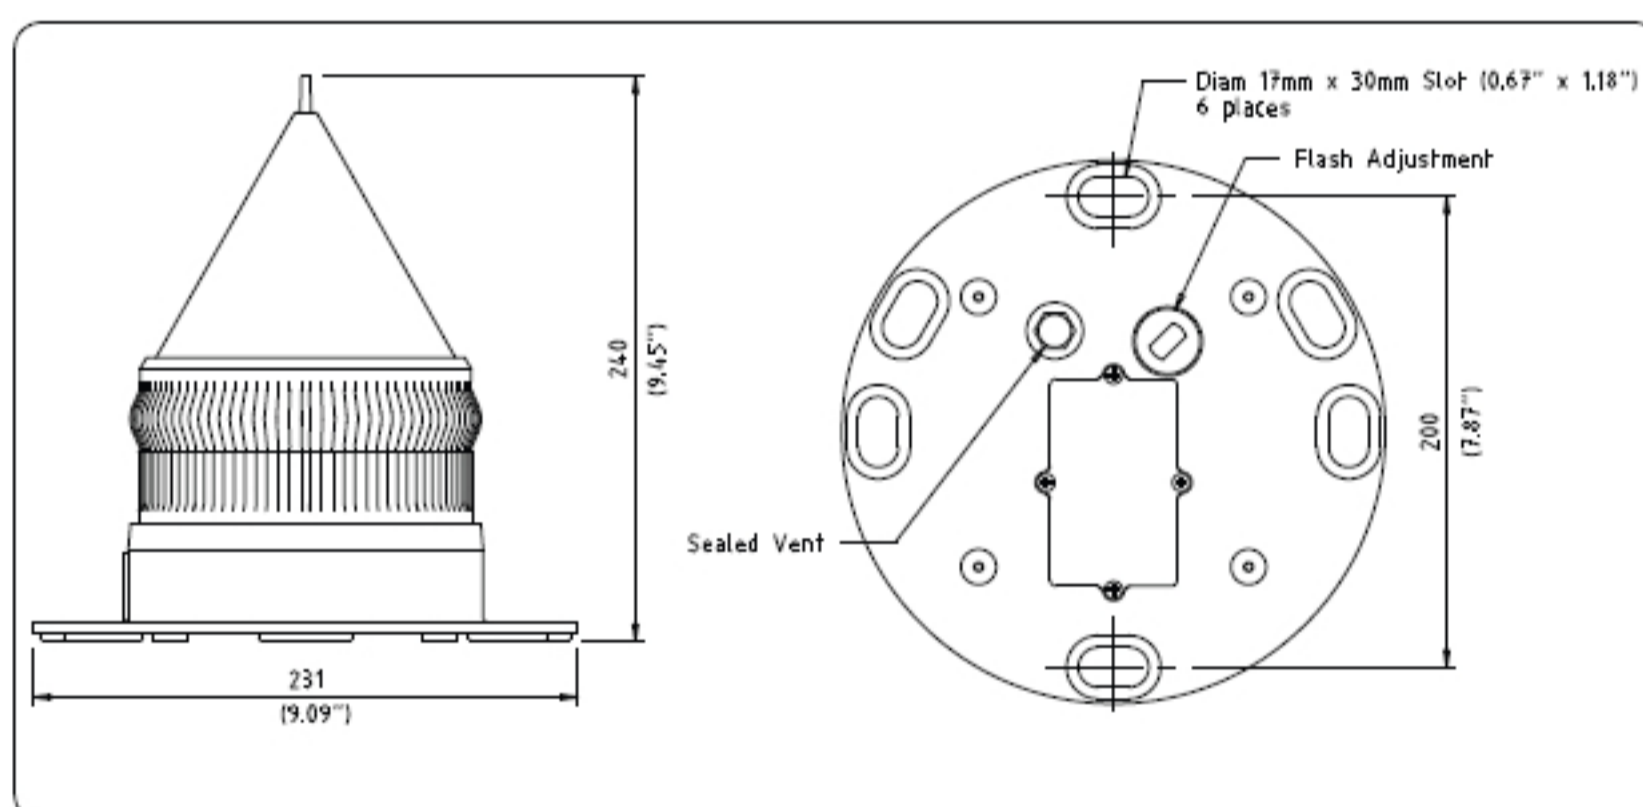

## SPECIFICATIONS

### Light Characteristics

Light Source  
Available Colours  
Maximum Available Intensity (cd)<sup>Δ</sup>  
Visible Range (nm)  
Horizontal Output (degrees)  
Vertical Divergence (degrees)  
Reflector Type

6 ultra-high intensity LEDs  
Red, Green, White, Yellow, Blue  
Red - 19.1 Green - 22.1 White - 20.2 Yellow - 16.3  
2-3+  
360  
9  
Omnidirectional 360° LED Reflector (US Pat. No. 6,667,582. AU Pat. No. 778,918)

Available Flash Characteristics  
Intensity Adjustments  
LED Life Expectancy (hours)

Up to 256 IALA recommended (user adjustable)  
Adjustable in 25% increments  
>100,000

### Electrical Characteristics

Current Draw (mA)  
Circuit Protection  
Nominal Voltage (v)  
Autonomy (days)  
Temperature Range

Refer to Sealite Power Calculator  
Integrated  
3.6  
30 (14 hour darkness, 12.5% duty cycle)  
-40 to 80°C

### Solar Characteristics

Solar Module Type  
Output (watts)  
Solar Module Efficiency (%)  
Charging Regulation

Multicrystalline  
2.5 (2 x 1.25watt)  
14  
Microprocessor controlled

### Power Supply

Battery Type  
Battery Capacity (Ah)  
Nominal Voltage (v)  
Battery Service Life

High grade NiMH - Environment friendly  
8  
3.6  
Average 5 years

### Physical Characteristics

Body Material  
Lens Material  
Lens Diameter (mm/Inches)  
Lens Design  
Mounting  
Height (mm/Inches)  
Width (mm/Inches)  
Mass (kg/lbs)  
Product Life Expectancy

LEXAN® Polycarbonate - UV-stabilised  
LEXAN® Polycarbonate - UV-stabilised  
150 / 5 7/8  
External optics with interior fluted design  
200mm OD base pattern  
240 / 9 1/2  
231 / 9 1/8  
1.4 / 3 1/8 (SL70/16Ah 1.6 / 3 1/2)  
Up to 12 years

### Certifications

CE  
Quality Assurance  
Waterproof

EN61000-6-3:1997. EN61000-6-1:1997  
ISO9001:2000  
IP68

### Intellectual Property

Patents  
Trademarks

US Pat. No. 6,667,582. AU Pat. No. 778,918  
SEALITE® is a registered trademark of Sealite Pty Ltd

### Warranty\*

Full 3 years

### Options Available

- 16Ah battery (SL70/16Ah)
- 12 LEDs (SL70-12)
- 50mm pole mount adaptor plate (MC/03)
- RF communication synchronisation (SL70-CS)
- Remote radio control (SL70-RC) with handheld radio controller (SL-RC-2.4)



Castellon, Spain



Western Australia Installations



\* Specifications subject to change or variation without notice  
• Subject to standard terms and conditions  
Δ Intensity setting subject to solar availability